



Marine Bronze Valve, Marine Cast Iron Valve, Marine Cast Steel Valve, Air Pipe Head, Butterfly Valve, Flange, Strainer  
International Marine Valve Supplier

---

[Home](#)

[About us](#)

[Products](#)

[Service](#)

[Quality](#)

[Contact us](#)

[Sitemap](#)

---

[Marine Cast Steel valve >> JISF7363C/7366 Cast Steel Gate Valve 5K/10K](#)

[Back Out](#)


---

### JISF7363C/7366 CAST STEEL GATE VALVE 5K/10K



---

JISF7363C/7366 Cast Steel Gate Valve 5K/10K Detail

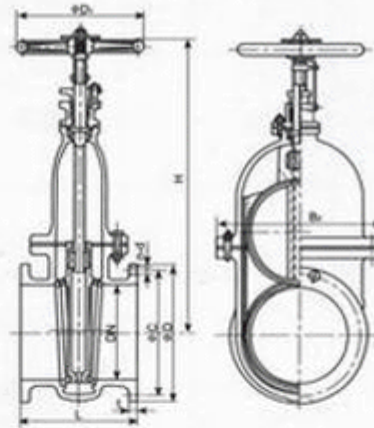

Marine Cast Steel Gate Valves JIS7363C 5K  
Marine Cast Steel Gate Valves JIS7366 10K

**MAIN DATA FOR JOINING(mm)**

DN	L	D	C	n-d	t	H	D <sub>1</sub>	B <sub>2</sub>	Weight (kg)
50	180	130	105	4-15	16	285	125	153	13.5
65	190	155	130	4-15	18	330	140	172	19.0
80	200	180	145	4-19	18	380	160	195	24.2
100	230	200	165	8-19	20	430	180	230	35.3
125	250	235	200	8-19	20	495	200	265	48.1
150	270	265	230	8-19	22	560	224	295	65.3
200	290	320	280	8-23	24	680	280	365	103
250	330	385	345	12-23	26	800	355	438	164
300	370	430	390	12-23	28	920	400	520	236

**Capability:**

Nominal Pressure	5kgf/cm <sup>2</sup> (0.49Mpa)
Seal Pressure	7.7kgf/cm <sup>2</sup> (0.76Mpa)
Intensity Pressure	10.5kgf/cm <sup>2</sup> (1.03Mpa)

Medium	Max Pressure kgf/cm <sup>2</sup>	
Saturation steam	$\phi < 200$ 3 kgf/cm <sup>2</sup>	$\phi < 250$ 2 kgf/cm <sup>2</sup>
Oil&flow water	5 kgf/cm <sup>2</sup>	
Lentic water $\leq 120^{\circ}\text{C}$	7 kgf/cm <sup>2</sup>	

**Applicable scope**

The JIS marine valve are used for controlling the medium to open and close in fuel oil piping ,lubricating water, steam piping at temperatures 120°C or less Dimensions of flange

**MAIN DATA FOR JOINING(mm)**

DN	L	D	C	z-h	t	H	D <sub>1</sub>	B <sub>2</sub>	Weight (kg)
50	200	155	120	4-19	16	300	140	160	17.1
65	220	175	140	4-19	18	350	160	192	26.5
80	230	185	150	8-19	18	400	180	212	31.5
100	250	210	175	8-19	18	450	200	245	44.9
125	270	250	210	8-23	20	520	224	285	63.2
150	290	280	240	8-23	22	580	250	320	82.3
200	310	330	290	12-23	22	700	315	400	130
250	340	400	355	12-25	24	840	400	488	203
300	380	445	400	16-25	24	960	450	525	291

**Capability:**

Nominal Pressure	10 kgf/cm <sup>2</sup> (0.98Mpa)
Seal Pressure	15.4 kgf/cm <sup>2</sup> (1.52Mpa)
Intensity Pressure	21 kgf/cm <sup>2</sup> (2.07Mpa)

Medium	Max Pressure kgf/cm <sup>2</sup>	
Saturation steam	$\phi < 200$ 5 kgf/cm <sup>2</sup>	$\phi < 250$ 3 kgf/cm <sup>2</sup>
Oil&flow water	10 kgf/cm <sup>2</sup>	
Lentic water $\leq 120^{\circ}\text{C}$	14 kgf/cm <sup>2</sup>	

**Materials of major parts**

Part name	Material	
	Name	Mark
Body, Bonnet	Cast steel	ZG230-450

**Marine Cast Steel Valve** Data Download

JISF7363C/7366

Cast Steel Gate Valve 5K/10K

[Download](#)

---

Copyright @ HuaAoTe industrial limited company All Rights Reserved.  
Link: JIS Marine Bronze Valve,Marine Cast Iron Valve,Marine Steel Valve,Ship Building Valve